


# FUSION INKA VENGE

## Porcelain Tile

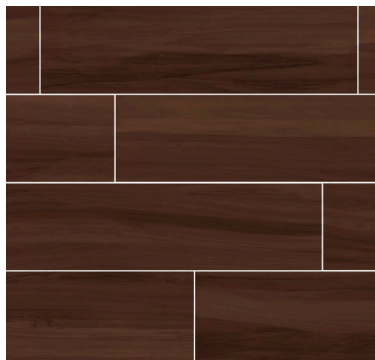

### SIZES

|                   | SQ.FT.<br>CARTON | PIECES PER<br>CARTON |
|-------------------|------------------|----------------------|
| 6 x 24 Field Tile | 18.40            | 19                   |

### TRIM

| TYPE  | NUMBER | SIZE   | PCS. PER<br>CARTON |
|---|--------|--------|--------------------|
|  Bullnose | S-43C9 | 6 x 24 | 19                 |

### COMMERCIAL USAGE

|                    | INTERIOR    |            |            |             |            |
|--------------------|-------------|------------|------------|-------------|------------|
|                    | LIGHT       |            |            |             |            |
|                    | RESIDENTIAL | COMMERCIAL | COMMERCIAL | RESIDENTIAL | COMMERCIAL |
| Floors/Patios      | ✓           | ✓          | ✓          | ✓           | ✓          |
| Walls/Backsplashes | ✓           | ✓          | ✓          | ✓           | ✓          |
| Countertops        | ✓           | ✓          | ✓          | ✓           | ✓          |
| Pool Decking       | ✓           | ✓          | ✓          | ✓           | ✓          |
| Pool Linings       | ✓           | ✓          | ✓          | ✓           | ✓          |

Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

### NOTES

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thinset is recommended for installation.

Special care needs to be given when installing tiles 20" and larger. Please refer to [www.tileoptima.com/LargeTiles](http://www.tileoptima.com/LargeTiles) for information.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

For additional information, refer to "Factors to Consider" at [www.tileoptima.com/CommercialFactors](http://www.tileoptima.com/CommercialFactors).

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

### SHADE VARIATION



HIGH (V3)

Color variation from tile to tile and within each tile.

### INSTALLATION

| THICKNESS | GROUT JOINT RECOMMENDATION   |
|-----------|--|
| 3/8"      | 1/8" (3/16" when rectangular sizes are used in a staggered brick-joint pattern, where the overlap does not exceed 33%) |

### DYNAMIC C.O.F. (WET) : 2

The higher the rating, the higher the slip resistance.

1 < 0.42

2 ≥ 0.42

### STATIC C.O.F. (WET) : 2

1 0.50 - 0.59

2 ≥ 0.60

### TEST RESULTS

|                     | ASTM#  | Textured Result            | Unpolished Result          |
|---------------------|--------|----------------------------|----------------------------|
| Water Absorption    | C373   | < .05%                     | < .05%                     |
| Breaking Strength   | C648   | > 450 lbs                  | > 450 lbs                  |
| Scratch Hardness    | MOHS   | 8                          | 8                          |
| Chemical Resistance | C650   | Resistant                  | Resistant                  |
| Dynamic C.O.F.      | A137.1 | Wet: ≥ 0.42                | Wet: ≥ 0.42                |
| Static C.O.F.       | C1028  | Wet: ≥ 0.65<br>Dry: ≥ 0.80 | Wet: ≥ 0.60<br>Dry: ≥ 0.70 |



**TILEOPTIMA**  
hospitality division