



SILVER SILK STONE



**TILEOPTIMA**  
THE ULTIMATE HOSPITALITY SOURCE



# SILVER SILK STONE

## FLOOR TILE



WHITE RITZ



BEIGE FLAIR




LIGHT BROWN



GOLD GLAM



GRAY SHIMMER

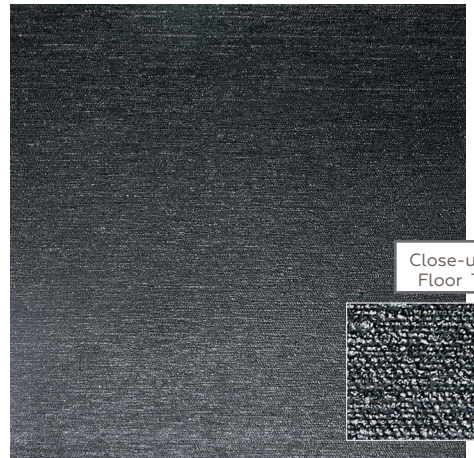




BLACK DRAMA

Close-up of  
Floor Tile




# SILVER SILK STONE

## SIZES

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	12 x 24 Floor Tile	(11-3/4" x 23-9/16") (29.80 cm x 59.80 cm)	3/8"	15.49	8
	6 x 24 Floor Tile	(5-13/16" x 23-9/16") (14.80 cm x 59.80 cm)	3/8"	10.65	11
	12 x 12 Floor Tile	(11-3/4" x 11-3/4") (29.80 cm x 29.80 cm)	3/8"	10.65	11
	2 x 2 Mosaic (Mesh-mounted on 1' x 1' Sheet)	(11-3/4" x 11-3/4" Sheet) (29.80 cm x 29.80 cm Sheet)	3/8"	10.65	11
	1 x 2 Mosaic+ (Mesh-mounted on 1' x 1' Sheet)	(11-3/4" x 11-3/4" Sheet) (29.80 cm x 29.80 cm Sheet)	3/8"	10.65	11

+ Available in two unique color blends only.

## LINEAR OPTIONS™ SIZES

			Sq. Ft. Per Carton	Pieces Per Carton
	2 x 24 Field Tile	(1-15/16" x 23-9/16") (4.92 cm x 59.80 cm)	6.66	20

Additional linear and rectangular sizes are also available.

## FLOOR APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior	N/A	✓
Wet & Level – Interior	≥ 0.42	✓*
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).

## OTHER APPLICATIONS

	Suitable
Walls/Backsplashes	✓
Countertops	✓
Pool Linings	✓**




### APPLICATION NOTES:

\*Floor tile and mosaic suitable. Mosaic also suitable for residential and light commercial shower floors.

\*\*Mosaic only


Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

## TRIM

	Type	Number	Size	Pieces Per Carton
	Bullnose	S-43C9	3 x 12	33
	Cove Base	P-36C9T	6 x 12	22
	Cove Base Outcorner	PC-36C9T	1 x 6	15

Bullnose, cove base, and cove base corner trim are intended to coordinate with floor tile in the standard 90-degree installation position.

## INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern and/or when tile with a length 15" or greater is installed in a staggered brick-joint pattern. Overlap should not exceed 33%)	 Medium (V2)

## TEST RESULTS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 450 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

## NOTES

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.