



GLAZED PORCELAIN ..... SILK STONE

# GLAZED PORCELAIN

# SILK STONE



*floor • wall • countertop*

Silk Stone combines the detail of the fine fabrics with porcelain flooring that creates an atmosphere as rich and intricate as handcrafted linen. Taking cues from different textures and colors, the Silk Stone collection draws inspiration from the way fabric moves and allows you to bring a delicate elegance to any space.

floor • wall • countertop

# GLAZED PORCELAIN

SILK STONE

*Field Tile*



BLANC LINEN



CRÈME LINEN



SOLEIL LINEN



BRUN LINEN



GRIS LINEN



NOIR LINEN

# CREATIVE IDEAS



BLANC LINEN



CRÈME LINEN



SOLEIL LINEN



BRUN LINEN




GRIS LINEN




NOIR LINEN

## *Pattern Ideas*

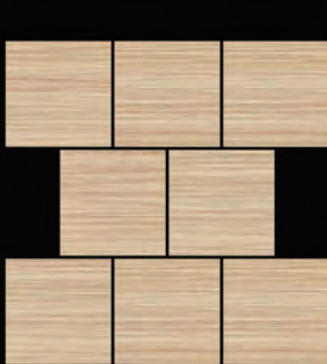

BRICK

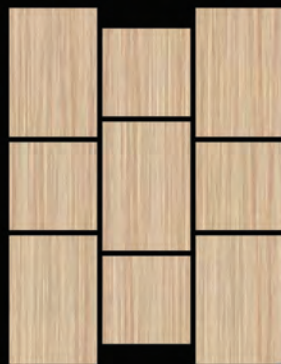

ALTERNATING  
VERTICAL



BASKETWEAVE  
VERTICAL



BASKETWEAVE  
HORIZONTAL

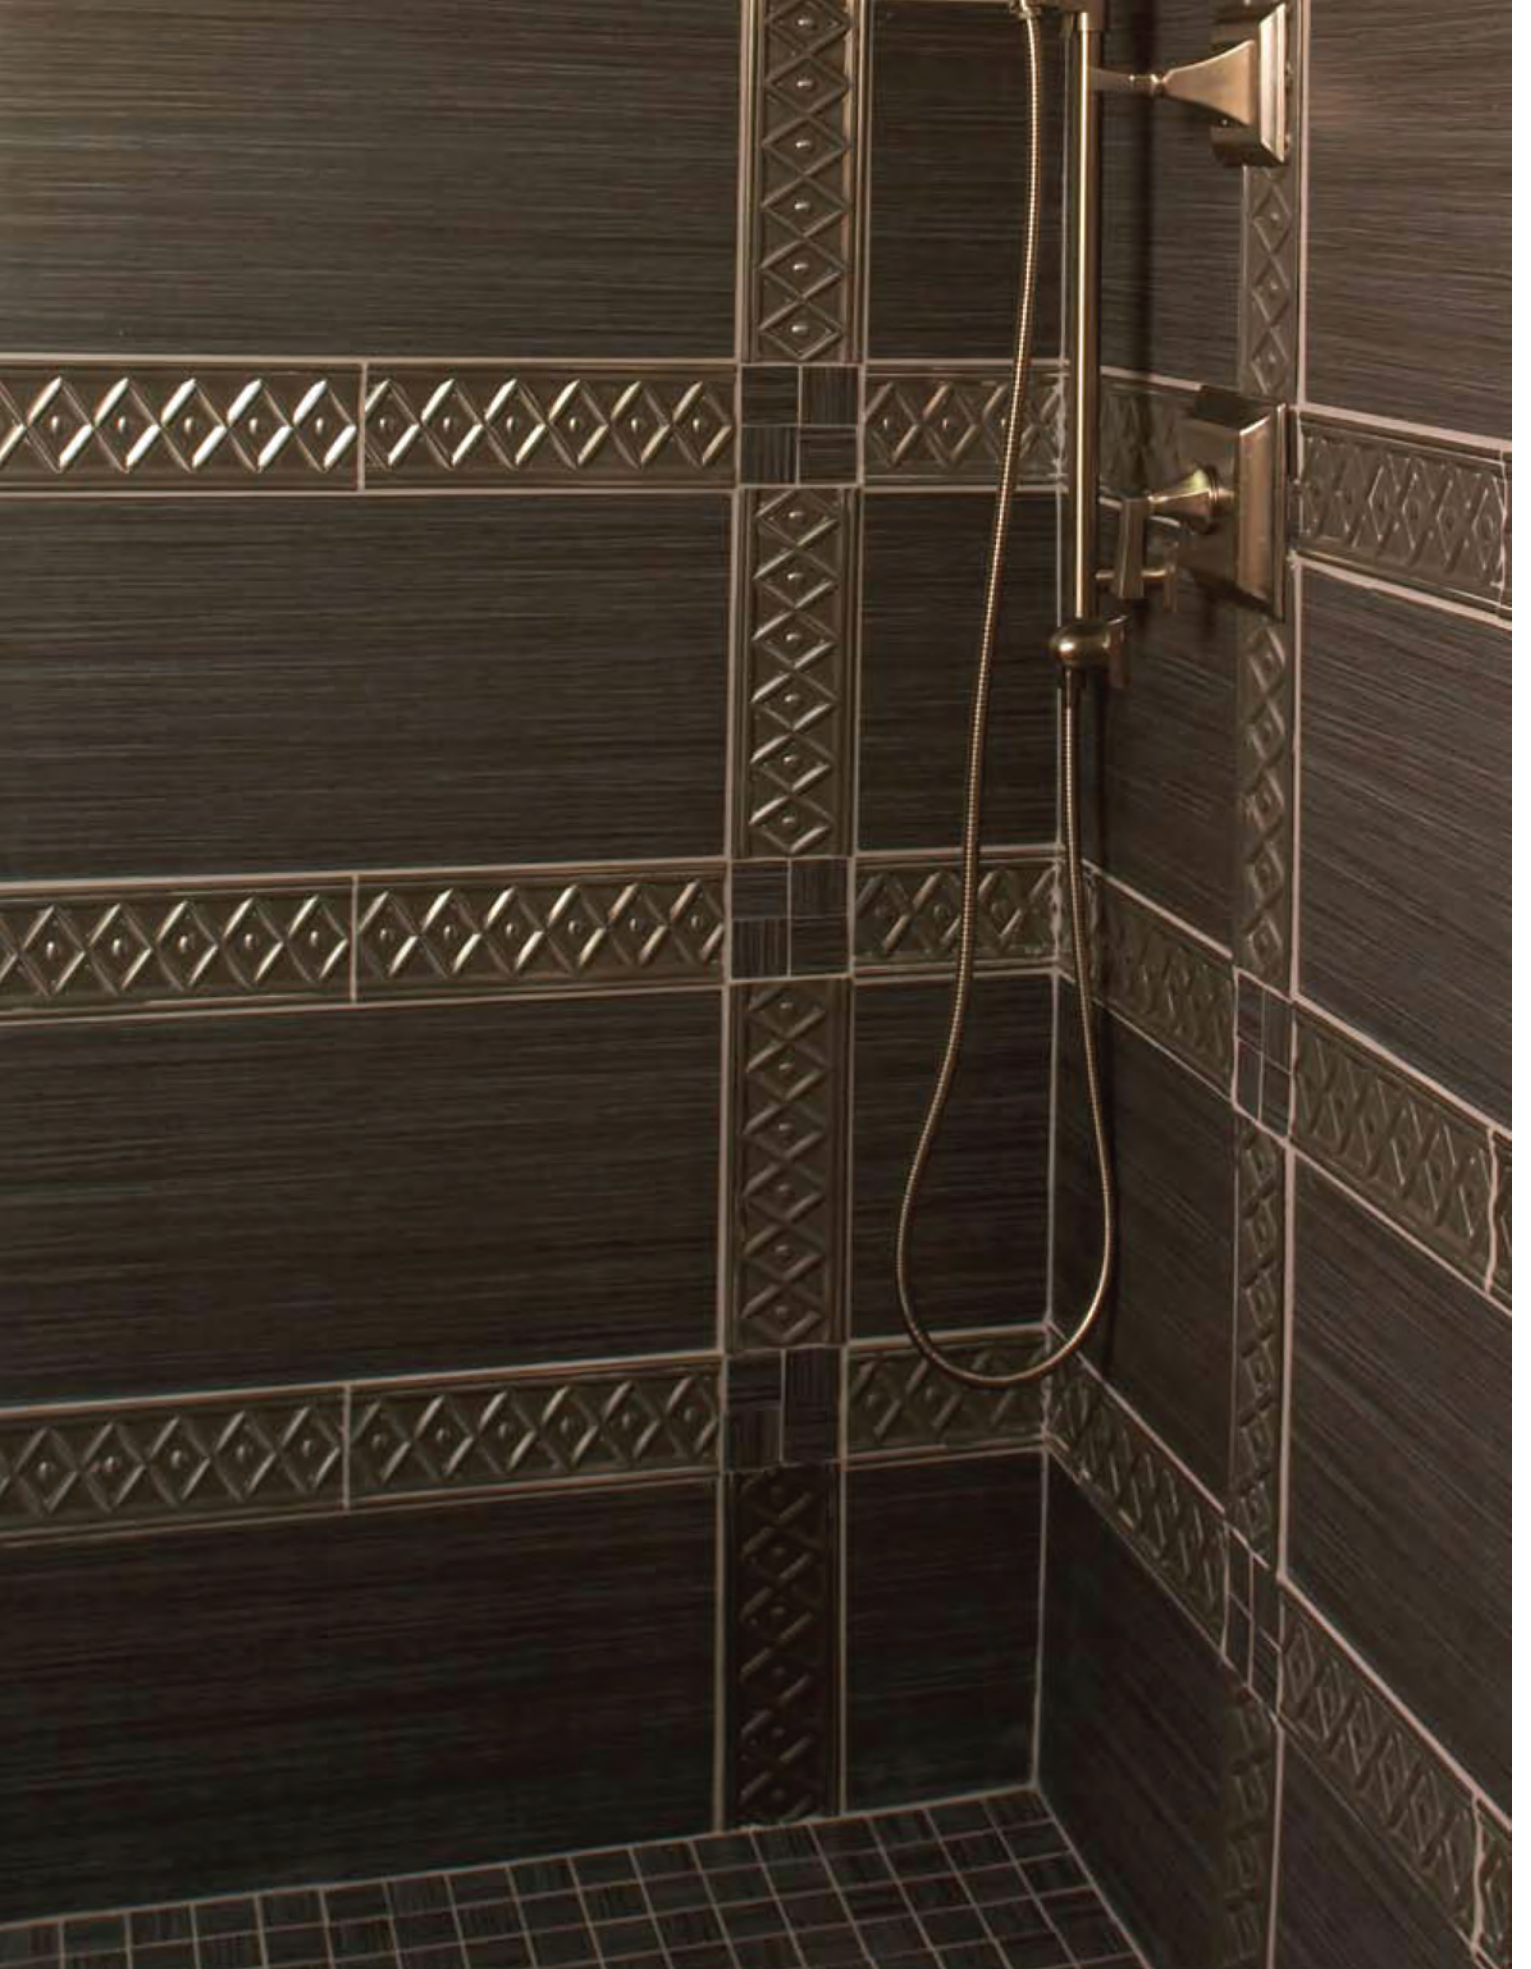


Photo features Silk Stone Noir Linen in 12" x 24" and 2" x 2" Mosaics, and Metal Ages 4" x 12" Corbel Accent in Polished Pewter on shower wall. Shower floor features Silk Stone Noir Linen in 2" x 2" Mosaics.

# GLAZED PORCELAIN

# SILK STONE

## SIZES

NOMINAL	ACTUAL	SQ.FT. CARTON	PIECES PER CARTON
24" x 24" Field Tile (Unpolished)	23-9/16" x 23-9/16" (59.8 cm x 59.8 cm)	15.49	4
12" x 24" Field Tile (Light Polished & Unpolished)	11-3/4" x 23-9/16" (29.8 cm x 59.8 cm)	15.49	8
12" x 12" Field Tile (Unpolished)	11-3/4" x 11-3/4" (29.8 cm x 29.8 cm)	10.65	11
2" x 2" Mosaic (Unpolished)	11-3/4" x 11-3/4" (29.8 cm x 29.8 cm) (*Mesh-mounted on 12" x 12" sheet)	10.65	11

## LINEAR OPTIONS™ SIZES\*

NOMINAL	ACTUAL	SQ.FT. CARTON	PIECES PER CARTON
6" x 24" Field Tile	6" x 24" (14.63 cm x 59.8 cm)	10.65	11
4" x 24" Field Tile	4" x 24" (9.73 cm x 59.8 cm)	6.46	10
2" x 24" Field Tile	2" x 24" (4.67 cm x 59.8 cm)	6.66	20

\*Additional linear and rectangular sizes available through Linear Options™, Daltile's linear cutting service. Visit [www.daltileproducts.com/lineartileoptions](http://www.daltileproducts.com/lineartileoptions) for sizes and order information.

## RESIDENTIAL

### RESIDENTIAL USAGE

FLOOR	WALL	COUNTERTOPS	EXTERIOR PATIOS	EXTERIOR POOL DECKS
F	W	C	EP	

## COMMERCIAL

### COMMERCIAL APPLICATION

	LIGHT COMMERCIAL	COMMERCIAL	COMMERCIAL EXTERIORS
Floors**	◆	◆	
Walls/Backsplashes	◆	◆	◆
Counters	◆	◆	◆
Pool Decking			
Pool Linings	◆	◆	◆

Suitable for exterior walls in freezing and non-freezing climates when proper installation methods are followed.

\*\*Unpolished only




5650 General Washington Drive Alexandria, VA 22312 Ph: 703 256 5650 Fax: 703 256 8878  
For more information about our products and services, visit our website at [www.tileoptima.com](http://www.tileoptima.com)

## TRIM

TYPE	SIZE	PIECES PER CARTON
Bullnose* S-43C9 (Light Polished & Unpolished)	3" x 12"	33

\*Bullnose also available in horizontal design in Light Polished & Unpolished in all colors via Special Order.

## SHADE VARIATION



## INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION
3/8"	1/8" (3/16" when rectangular sizes are used in a staggered brick-joint pattern, where the overlap does not exceed 33%)

## SLIP RESISTANCE (WET) : 2 & 3

The higher the rating, the higher the slip resistance.

1	< .50
2	.50 - .59 (Light Polished)
3	≥ .60 (Unpolished)

## TEST RESULTS

	ASTM#	RESULTS
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 450 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Coefficient of Friction (Unpolished)	C1028	Wet: ≥ 0.60 Dry: ≥ 0.70
Coefficient of Friction (Light Polished)	C1028	Wet: ≥ 0.50 Dry: ≥ 0.70

## NOTES

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A 137.1 standards.

For additional information, refer to "Factors to Consider" at [www.tileoptima.com](http://www.tileoptima.com) CommercialFactors.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.