
ATELIER





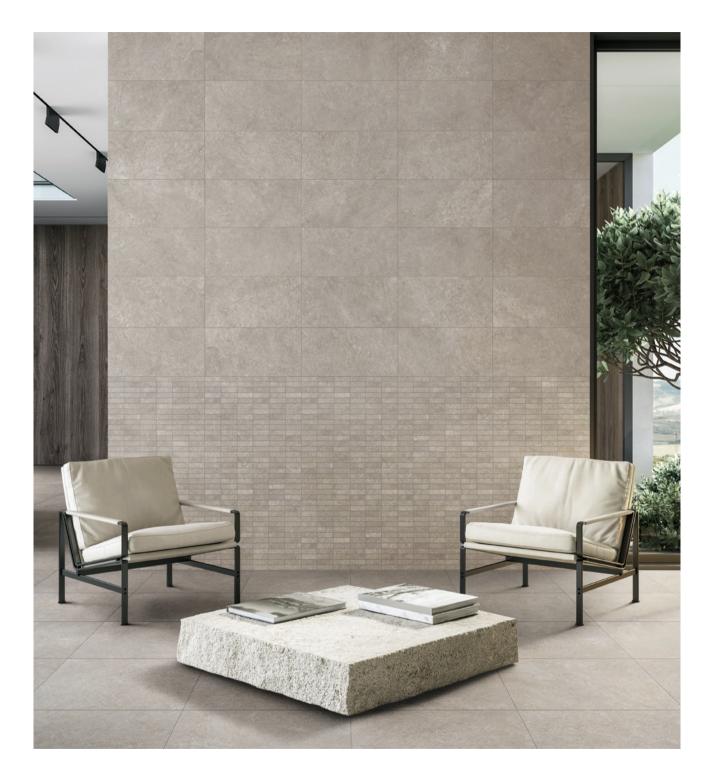

Sustainable Tile, Made in the USA

Atelier

(uh-teh-lee-yay) noun

1. A workshop or studio used by an architect, artist, or designer.

Contents

Colors / Sizes / Mosaics Visualizations Specifications Accreditations


_					 1		
-							
-							
-							
-							
-							
-							
1							
1							


pg. 2 pg. 5 pg. 18 pg. 20

COLOR





SIZES






MOSAICS









COLOR




SIZES

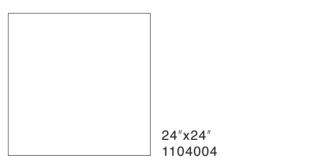

MOSAICS





WHITE SAND

SUNSET


(1"x3") Mosaic

11.65"x11.65" (64 DOT) Mosaic 1104013


12"x24" 1104010 COLOR





SIZES

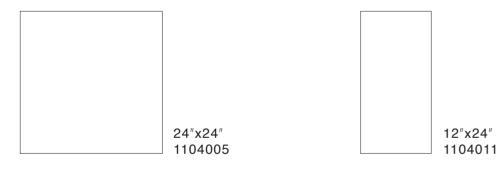


MOSAICS







NIGHT SKY

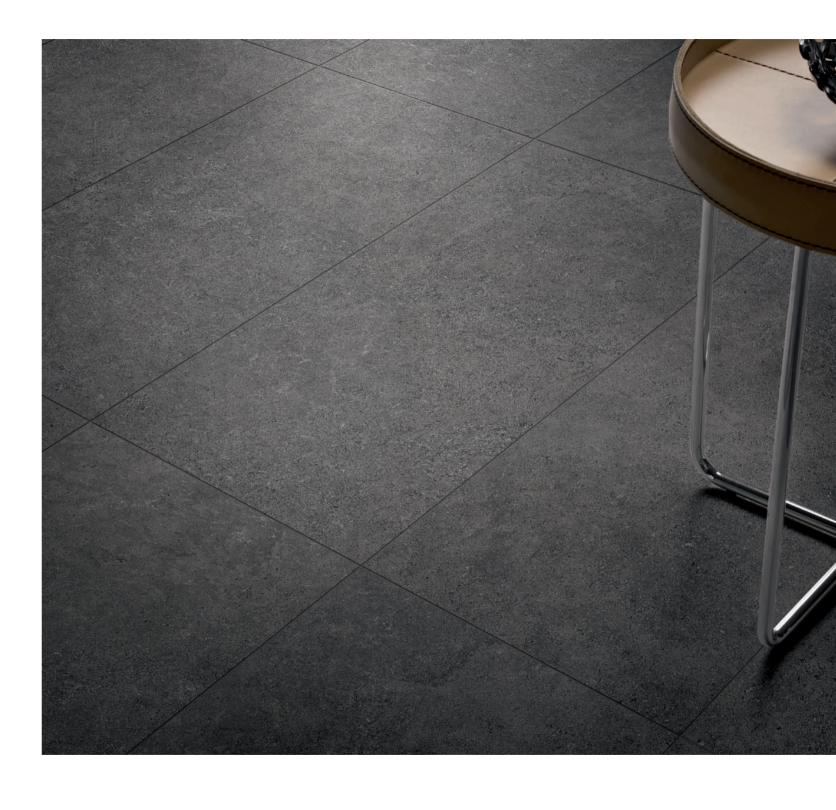




Wall: Atelier_11.77"x11.77" (1x4) Mosaic_12"x24"_Sunset_Matte Floor: Atelier_24"x24"_Sunset_Matte





Floor: Atelier_12"x24"_White Sand_Matte



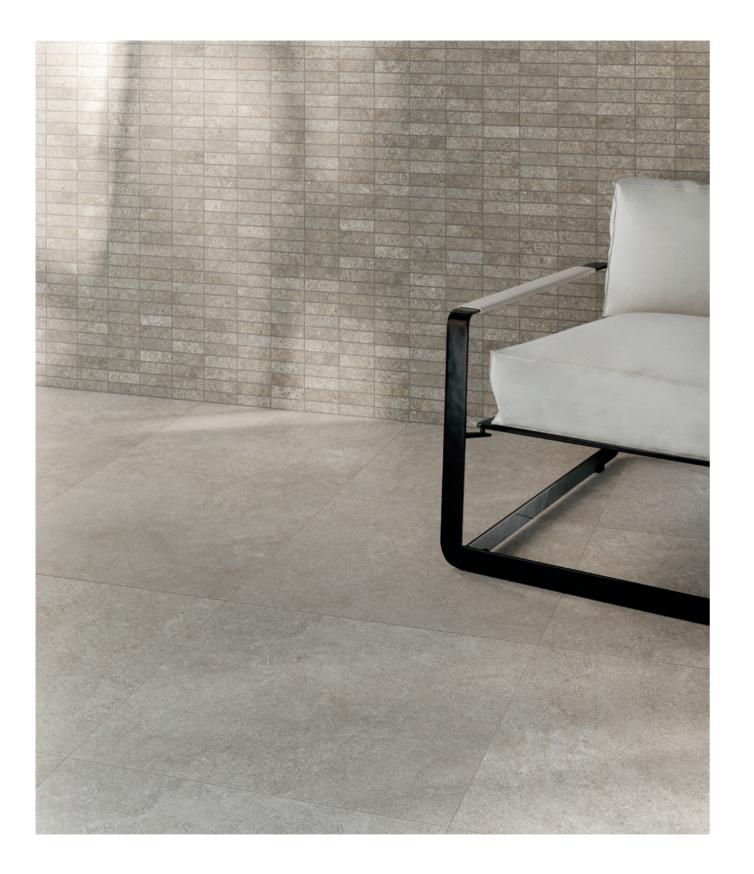

Wall: Atelier_11.77"x11.77" (1x4) Mosaic_Sunset_Matte Floor: Atelier_24"x24"_Sunset_Matte Wall: Atelier_11.77"x11.77" (1x4) Mosaic_Sunset_Matte Floor: Atelier_24"x24"_Sunset_Matte



Wall / Backsplash: Atelier_11.65"x11.65" (64 DOT) Mosaic_Night Sky_Matte Floor: Atelier_24"x24"_Night Sky_Matte



Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1. Este product cumple o exceed todos los estandares de ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	MILE [®] sto	one VALUES
٢	WATER ABSORPTION	ASTM C373	≤0.5%	≤	0.4%
	P P P P P P P P P P P P P P P P P P P	ASTM C373	0.5%	absorption Americ	g the water o criteria of the an national lard PTCA
*	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.		ALL . / COMMERCIAL
•	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT A	FFECTED
*	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42 WET	≥0.4	42 WET
*	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recordedpost cleaning.	NOT A	FFECTED
ڡ۫	BREAKING STRENGTH	ASTM C648	≥250 lbf	-	≥300 lbf n ≥400 lbf
**	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
H	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
H	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
ı	THICKNESS	ASTM C499	Range: ± 0.04 in).04 in

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficent of friction may vary within and between product runs.

Packaging Specifications

SIZES		PIECES PER BOX	UOM PER BOX	WEIGHT PER BOX	BOXES PER PALLET	UOM PER PALLET	WEIGHT PER PALLET*
NOMINAL	8 mm	8	16 SF	54.4 LBS	48	768 SF	2,611.2 LBS
NOMINAL	8 mm	4	16 SF	54.4 LBS	36	576 SF	1,958.4 LBS
NOMINAL	8 mm	10	10 PCS	33 LBS	45	450 PCS	1,485 LBS
NOMINAL	8 mm	10	10 PCS	33 LBS	45	450 PCS	1,485 LBS
NOMINAL	8 mm	10	10 PCS	33 LBS	45	450 PCS	1,485 LBS
	NOMINAL NOMINAL	NOMINAL 8 mm NOMINAL 8 mm NOMINAL 8 mm	(MM) PER BOX NOMINAL 8 mm 8 NOMINAL 8 mm 4 NOMINAL 8 mm 10 NOMINAL 8 mm 10	(MM)PER BOXPER BOXNOMINAL8 mm816 SFNOMINAL8 mm416 SFNOMINAL8 mm1010 PCSNOMINAL8 mm1010 PCS	(MM) PER BOX PER BOX PER BOX NOMINAL 8 mm 8 16 SF 54.4 LBS NOMINAL 8 mm 4 16 SF 54.4 LBS NOMINAL 8 mm 4 16 SF 54.4 LBS NOMINAL 8 mm 10 10 PCS 33 LBS NOMINAL 8 mm 10 10 PCS 33 LBS	(MM) PER BOX PER BOX PER BOX PALLET NOMINAL 8 mm 8 16 SF 54.4 LBS 48 NOMINAL 8 mm 4 16 SF 54.4 LBS 36 NOMINAL 8 mm 10 10 PCS 33 LBS 45 NOMINAL 8 mm 10 10 PCS 33 LBS 45	(MM) PER BOX PER BOX PER BOX PALLET PALLET NOMINAL 8 mm 8 16 SF 54.4 LBS 48 768 SF NOMINAL 8 mm 4 16 SF 54.4 LBS 36 576 SF NOMINAL 8 mm 10 10 PCS 33 LBS 45 450 PCS NOMINAL 8 mm 10 10 PCS 33 LBS 45 450 PCS

* WEIGHT PER PALLET DOES NOT INCLUDE PALLET WEIGHT ITSELF. ALL OTHER SIZES WILL BE PACKAGED AS ORDERED. PLEASE CONTACT MILESTONE CUSTOMER SERVICE AT 1-877-356-7461 FOR PACKAGING INFORMATION.

** MOSAIC SIZES ARE APPROXIMATE AND DO NOT REFLECT ACTUAL COVERAGE AREA. ACTUAL MOSAIC COVERAGE AREA IS AS FOLLOWS: 11.77"x11.77" (1"x4") MOSAIC = 0.968 SF/PC

11.7"x11.7" (1"x3") MOSAIC = 0.947 SF/PC

11.65"x11.65" (64 DOT) MOSAIC = 0.968 SF/PC

MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16") IF STAGGERED TILE PLACEMENT, WE RECOMMEND USING A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").

Green Memberships & Accreditations

DESCRIPTION

[DESCRIPTION
Son out the solution of the so	Defines post-consumer content of as much as 3% recycled glass which reduces landfill impact.
Recurrence Consume	Defines pre-consumer content of as much as 45% recycled material which reduces our carbon footprint.
	Florim USA sources >95% raw material within a 500 mile radius, which results in a smaller carbon footprint.
G GREEN SQUARED	Tile Council of North America and the American National Standards Institute's standard for sustainability and environmental impact.
Environment PRIORITY ONE	A declaration that Florim USA values the environment and works daily to minimize our adverse impact upon it.
	The Health Product Declaration Collaborative transparency declaration for all of Florim USA's naturally occurring materials.
Red List Free Declare.	Declare labels disclose all intentionally added ingredients and residuals present in the final product. Being Red List Free means the worst materials, chemicals, and elements for human and environmental health are not present within our products.
Certified Environmental Product Declaration www.storg	Certification of plant and product specific Environmental Product Declaration (EPD) which tracks environmental impacts from the production of porcelain tile.
CECENCIGAD	Underwriter's Laboratories certification of low emitting materials. Florim USA is Green Guard Gold certified.
Product Certification BUREAU VERITAS Certification	Bureau Veritas Standards Program verifies and certifies both pre- and post-consumer recycled content.
TILE COUNCIL OF NORTH AMERICA, INC.	Florim USA actively participates in the Tile Council of North America which allows us to be on the forefront of advances in the tile industry and its standards.
A CHARTER A	USGBC is committed to suit a more sustainable life. Florim USA supports this mission by manufacturing products which aid architects in achieving USGBC certification.
INTERNATIONAL LIVING FUTURE INSTITUTE	Florim USA's sustainability and social practices support the mission of The International Living Future Institute which strives to create a socially just, culturally rich, and ecologically restorative community.
	The Tennessee Recycling Coalition is dedicated to promoting recycling and sustainable material management practices, and awarded Florim USA the Tennessee Recycler of the Year award for 2020.

Progress that invests in the entire society

As an active member of the U.S. Green Building Council, MILE[®] stone spreads awareness to the community and encourages the use of building solutions through environmentally friendly practices. Our products positively contribute to the requirements for obtaining the LEED (Leadership in Energy and Environmental Design) and WELL (IWBI) certifications.

A commitment to environmental sustainability and responsibility

We are committed to conscious development that minimizes the negative impact of manufacturing production on the environment. Our general approach to sustainability intersects with our business strategy to embrace three areas of responsibility: economic, social, and environmental. Some ways we prove this are:

- Products containing as much as 45% recycled content.
- Post-consumer recycled content levels as much as 3%.
- · Zero industrial wastewater discharge.
- A 99% internal process recycling rate.
- Local sourcing of >95% raw materials (within 500-mile radius of factory) resulting in low transportation related carbon emissions.

MILE[®] stone is taking these and other steps, as well as actively investing to reduce carbon emissions to ensure that we reach full carbon neutrality by 2030.







